



[www.lanman.si](http://www.lanman.si)

LANCMAN™

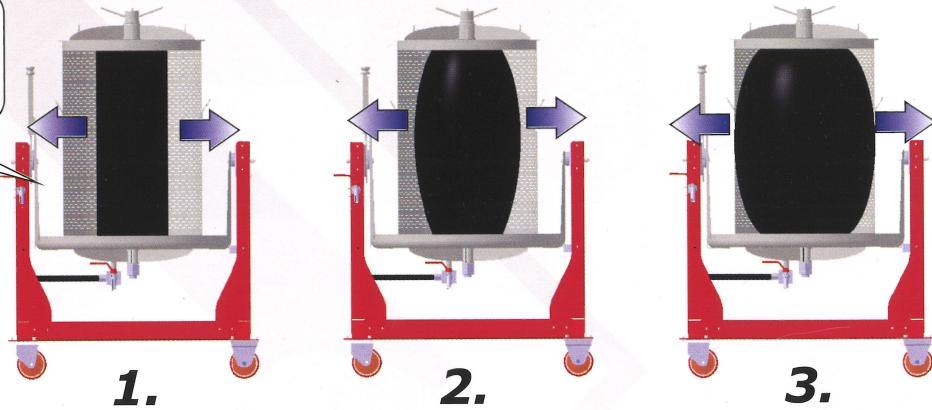

**WATER OPERATED BLADER PRESSES  
LANCMAN™**



FRUIT



HOW DOES THE PRESS WORK?



## BASIC INFORMATION:

- STORAGE BOWL, UNDERFRAME, COVER AND BASKET MADE OF STAINLESS STEEL, AISI 403 (W.NR.1.4301),
- PRESS SURFACE ELECTRO-POLISHED,
- **PRESSURE REGULATOR -> AUTOMATIC PRESSING**
- SUPPLY: HOUSEHOLD WATER PRESSURE

## EQUIPMENT:

- PRESSURE REGULATOR 1-4 BAR (N.A. VS-A 35),
- 2 FIX-WHEELS FOR TRANSPORT (N.A. VS-A 35),
- FILTER PRESSING NET GREEN,
- INCLUDING PVC - COVER FOR PRESS

## ADVANTAGE:

- EASY WATER HANDLE,
- WATER CONNECTION (IN): 1/2"
- WATER CONNECTION (OUT): 3/4"
- APPLE PRESSING TIME: from 20 min...,
- GRAPE PRESSING TIME: from 30 min...,
- EASY TO USE

## WATER PRESS LANCMAN VS-A

### LANCMAN VS-A 35

- BASKET SIZE: 35 l
- WEIGHT: 30 kg,
- WxLxH: 550x550x950 mm,
- WORKING PRESSURE: 3.8 bar,
- MAX PRESSURE: 4.0 bar

### LANCMAN VS-A 55

- BASKET SIZE: 55 l
- WEIGHT: 35 kg,
- WxLxH: 600x600x950 mm,
- WORKING PRESSURE: 2.8 bar,
- MAX PRESSURE: 3.0 bar

### LANCMAN VS-A 80

- BASKET SIZE: 80 l
- WEIGHT: 40 kg,
- WxLxH: 600x600x1.180 mm,
- WORKING PRESSURE: 2.8 bar,
- MAX PRESSURE: 3.0 bar

### LANCMAN VS-A 120

- BASKET SIZE: 120 l
- WEIGHT: 55 kg,
- WxLxH: 680x680x1.300 mm,
- WORKING PRESSURE: 2.8 bar,
- MAX PRESSURE: 3.0 bar

## EQUIPMENT

FILTER BAG FOR WATER PRESS FÜR VS 80

FILTER BAG FOR WATER PRESS VS 120

PRESSURE INDICATOR

PRESSURE REGULATOR FOR EASIER PRESSING.

TOP (STRONG AND LIGHT) FOR EASY HANDLING.

OUTLET

TRANSPORT WHEELS

INLET WATER CONNECTION 1/2"

SAFETY VALVE

OUTLET WATER CONNECTION 3/4"



# WATERPRESS LANCMAN™ VSPIX

## BASIC INFORMATION:

- STORAGE BOWL, UNDERFRAME, COVER AND BASKET MADE OF STAINLESS MATERIAL, AISI 403 (W.NR.1.4301),
- PRESS SURFACE ELECTRO-POLISHED,
- PRESSURE REGULATOR -> AUTOMATIC PRESSING,
- SUPPLY: HOUSEHOLD WATER PRESSURE,
- UNDERFRAME: STAINLESS STEEL

## EQUIPMENT:

- PRESSURE REGULATOR 1-4 BAR,
- 2 FIX + 2 SWIVEL - WHEELS FOR TRANSPORT,
- FILTER PRESSING NET GREEN,
- INCLUDING PVC - COVER FOR PRESS

## ADVANTAGE:

- EASY WATER HANDLE,
- WATER CONNECTION (IN): 1/2",
- WATER CONNECTION (OUT): 3/4",
- APPLE PRESSING TIME: from 20 min...,
- GRAPE PRESSING TIME: from 30 min...,
- EASY TO USE

**WATERPRESS  
LANCMAN VSPIX PLUS  
ON TOP ASSEMBLED  
CONNECTION G1.1/2"**

## LANCMAN VSPIX 80

- BASKET SIZE: 80 l
- WEIGHT: 64 kg,
- WxLxH: 800x870x1.300 mm,
- WORKING PRESSURE: 2.8 bar,
- MAX PRESSURE: 3.0 bar

## LANCMAN VSPIX 80 PLUS

- BASKET SIZE: 80 l
- WEIGHT: 64 kg,
- WxLxH: 800x870x1.300 mm,
- WORKING PRESSURE: 2.8 bar,
- MAX PRESSURE: 3.0 bar

## LANCMAN VSPIX 120

- BASKET SIZE: 120 l
- WEIGHT: 76 kg,
- WxLxH: 800x870x1.300 mm,
- WORKING PRESSURE: 2.8 bar,
- MAX PRESSURE: 3.0 bar

## LANCMAN VSPIX 120 PLUS

- BASKET SIZE: 120 l
- WEIGHT: 76 kg,
- WxLxH: 800x870x1.300 mm,
- WORKING PRESSURE: 2.8 bar,
- MAX PRESSURE: 3.0 bar

## LANCMAN VSPIX 170

- BASKET SIZE: 170 l
- WEIGHT: 83 kg,
- WxLxH: 800x870x1.350 mm,
- WORKING PRESSURE: 2.4 bar,
- MAX PRESSURE: 2.5 bar

## LANCMAN VSPIX 170 PLUS

- BASKET SIZE: 170 l
- WEIGHT: 83 kg,
- WxLxH: 800x870x1.350 mm,
- WORKING PRESSURE: 2.4 bar,
- MAX PRESSURE: 2.5 bar

## LANCMAN VSPIX 250

- BASKET SIZE: 230 l
- WEIGHT: 105 kg,
- WxLxH: 880x900x1.600 mm,
- WORKING PRESSURE: 2.4 bar,
- MAX PRESSURE: 2.5 bar

## LANCMAN VSPIX 250 PLUS

- BASKET SIZE: 230 l
- WEIGHT: 105 kg,
- WxLxH: 880x900x1.600 mm,
- WORKING PRESSURE: 2.4 bar,
- MAX PRESSURE: 2.5 bar

## EQUIPMENT

**FILTER BAG FOR WATER PRESS VS 80**

**FILTER BAG FOR WATER PRESS VS 120**

**FILTER BAG FOR WATER PRESS VS 170**

**FILTER BAG FOR WATER PRESS VS 250**





**DERIGO KFT**  
6725 Szeged, Moszkvai krt. 23. 3/15.  
Adószám: 25022155-2-06  
Közösségi adószám: HU25022155

**ENERGIANSÄÄSTÖ OY**  
Jantoniementie 167  
08350 LOHJA  
Puh. (019)338 164, 0500 316 119  
www.energian.net  
www.viljamylly.fi

**G<sup>c</sup> GOMARK**

trgovina in proizvodnja d.o.o. ČEPLJE 52, SI-3305 VRANSKO, SLOVENIA

TEL.: +386 (0) 3/700 15 03, FAKS: +386 (0) 3/700 15 04,

www.lancman.si, info@lancman.si

CONTACT

This catalog could include inaccuracies or typographical errors.

Gomark d.o.o. and the third party providers may make improvements and/or changes in the products, services and prices described in this catalog at any time without notice.

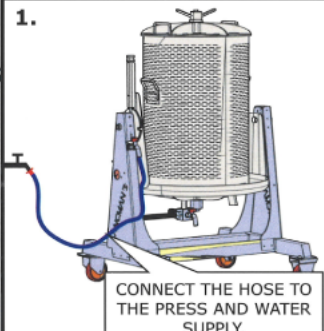
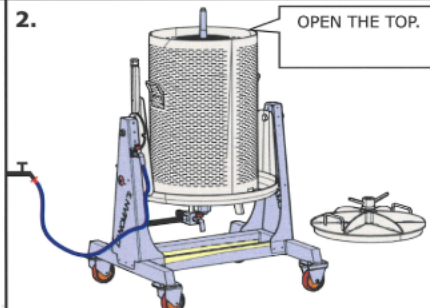
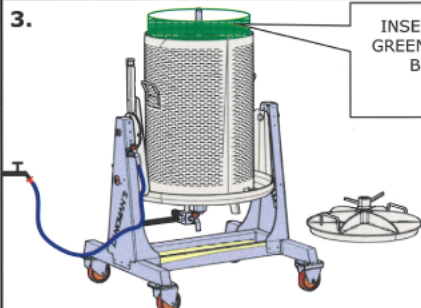
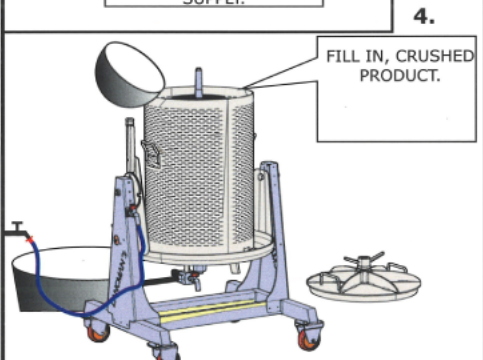
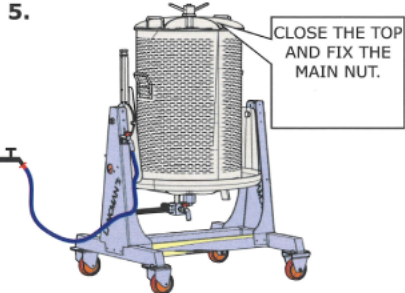
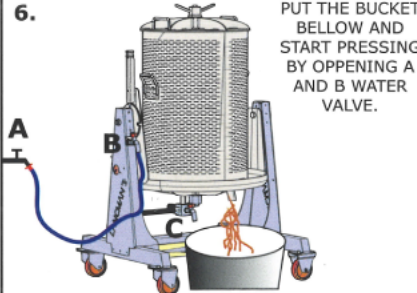
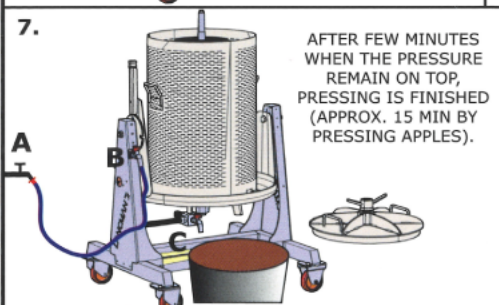
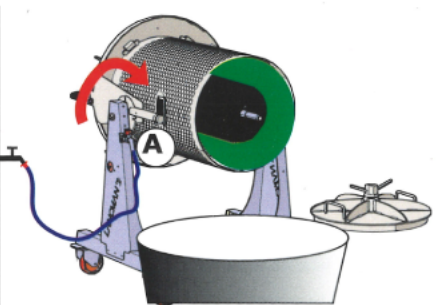
These terms represent the entire understanding relating to the use of the catalog and prevail over any prior or contemporaneous, conflicting or additional, communications.

DIZAJN © 2015 LANCMAN all rights reserved

Tabor, 01.02.2015

www.lancman.si • www.lancman.at • www.lancman.fr • www.lancman.ch • www.lancman.net

## INTRODUCTION & PRESENTATION

<b>1.</b>  <p>CONNECT THE HOSE TO THE PRESS AND WATER SUPPLY.</p>	<b>2.</b>  <p>OPEN THE TOP.</p>	<b>3.</b>  <p>INSERT THE GREEN FILTER BAG.</p>
<b>4.</b>  <p>FILL IN, CRUSHED PRODUCT.</p>	<b>5.</b>  <p>CLOSE THE TOP AND FIX THE MAIN NUT.</p>	<b>6.</b>  <p>PUT THE BUCKET BELOW AND START PRESSING BY OPENING A AND B WATER VALVE.</p>
<b>7.</b>  <p>AFTER FEW MINUTES WHEN THE PRESSURE REMAIN ON TOP, PRESSING IS FINISHED (APPROX. 15 MIN BY PRESSING APPLES).</p>	<b>8.</b>  <p>CLOSE A AND B VALVE, OPEN THE VALVE C TO RELEASE WATER. TILT THE BASKET AND PULL OUT THE REST.</p>	
<b>AFTER PRESSING, JUST CLEAN IT WITH COLD WATER.</b>		